Monkeytoe

PRODUCT SPECIFICATION SHEET

LADDERS

Monkeytoe Fold-down Ladder

PRODUCT DESCRIPTION

Fold down ladder for internal safe access to ceiling space or rooftop.

Monkeytoe

TYPICAL USES / APPLICATIONS

- Ideal where external access to roof is restricted
- Where floor space is limited
- Store rooms
- Mezzanine access
- Showrooms

CHARACTERISTICS / ADVANTAGES

- Designed for timber or steel truss roof construction
- Safe working load of 150kg
- Lightweight, robust, maintenance free
- Low aesthetic impact and prefinished door to suit surrounds

TECHNICAL DATA / MATERIALS	 Ladder sections: high tensile extruded aluminium Support frame: high tensile extruded aluminium (white powder coated) Mounting door: pre-finished 18mm white laminate panel or paintable MDF board
TESTS	APPROVALS / STANDARDS
	Relevant sections of AS/NZ 1657
	Building code B1
	 Stress load tested – 1.8kN applied at 75°
	• Dynamic load tested for ladders fitted with vertical mounted static line system – 1.2kN
WARRANTY	 10 years materials and 2 years install Product Warranty is valid in accordance to the PS1 Engineering Standard that it has been designed to
MAINTENANCE	• Visual inspection for any damage or loose fixings must be done periodically and prior to use.
	No certified maintenance is required.
	Basic wear and tear preventative maintenance is recommended,


Monkeytoe


PRODUCT SPECIFICATION SHEET




PRODUCT IMAGES



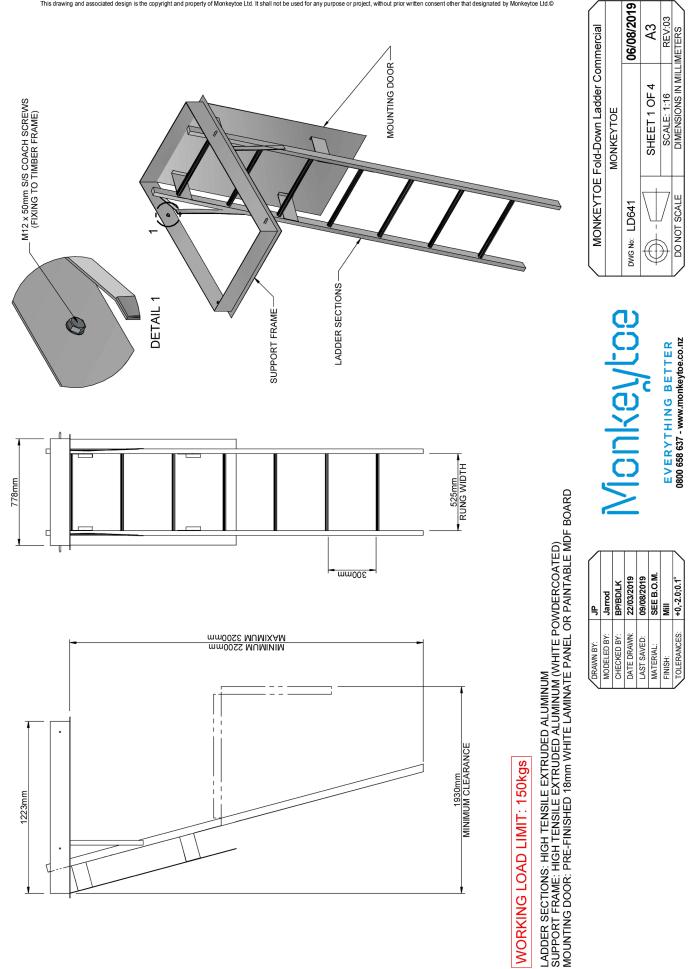

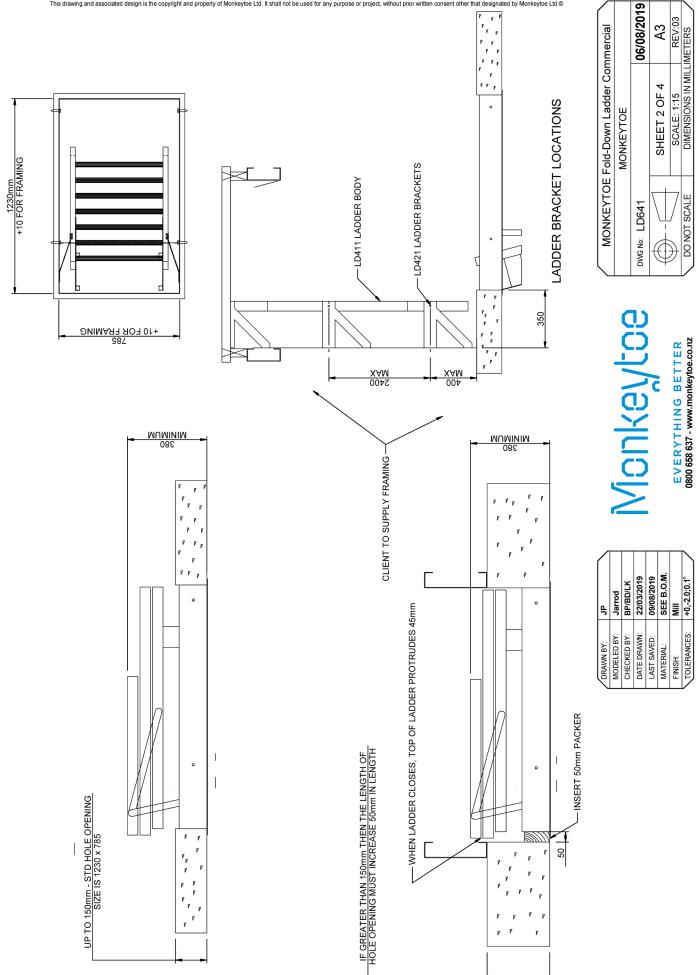

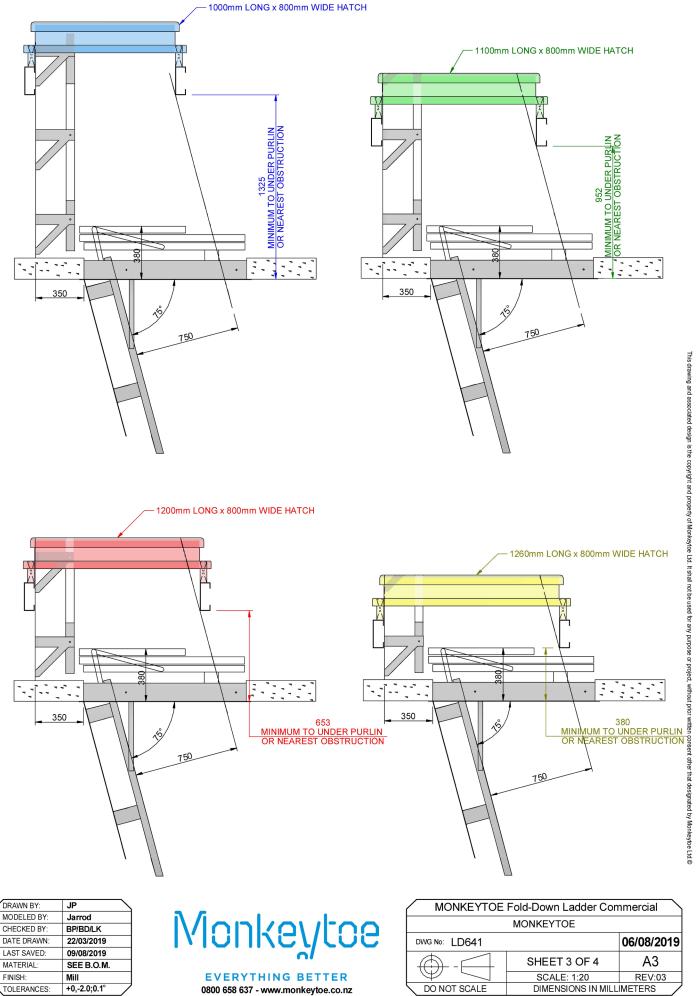

This drawing and associated design is the copyright and property of Monkeytoe Ltd. It shall not be used for any purpose or project, without prior

